Mebra Plastik Italia s.p.a.
via Tibet 23/25 Busto Arsizio (VA) 21052
Tel: 0331 344005
E-mail: mebra@mebra.it

PA 12 PHL



Tube in bars for loading granules. Excellent abrasion resistance, flexibility and range of diameters covering from the inner Ø 44 mm to 110 mm.

FEATURES


The tubes in this series are produced with plasticized flexible **12 PHL polyamide**, stabilized in light and heat and stored in our warehouses in **6 m straight bars**. Equipped with the **flexibility** characteristic of this material, they also enjoy **excellent resistance to abrasion and aging**. We produce a range of diameters covering from the inner Ø 44 mm to 110 mm.

SECTORS

INDUSTRIAL **FOOD**

APPLICATIONS

LOADING RAW MATERIAL GRANULES

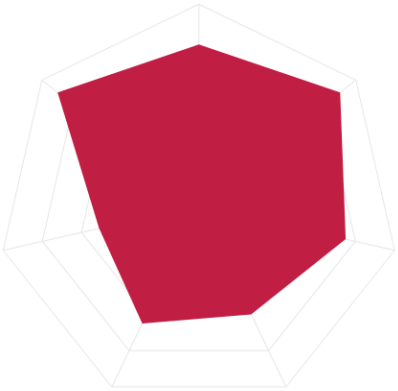

Mebra Plastik Italia s.p.a.
via Tibet 23/25 Busto Arsizio (VA) 21052
Tel: 0331 344005
E-mail: mebra@mebra.it

Products

Part number	Diametro int	Diametro est	Spessore	Colori standard		METRI .
12PHL44X51X6	44 mm	51 mm	3.5 mm	T	6 m	
12PHL50X60X6	50 mm	60 mm	5 mm	T	6 m	
12PHL53X61X6	53 mm	61 mm	4 mm	T	6 m	
12PHL55X63X6	55 mm	63 mm	4 mm	T	6 m	
12PHL60X70X6	60 mm	70 mm	5 mm	T	6 m	
12PHL62X70X6	62 mm	70 mm	4 mm	T	6 m	
12PHL70X80X6	70 mm	80 mm	5 mm	T	6 m	
12PHL72X80X6	72 mm	80 mm	4 mm	T	6 m	
12PHL80X90X6	80 mm	90 mm	5 mm	T	6 m	
12PHL90X100X6	90 mm	100 mm	5 mm	T	6 m	

PRESSURE/TEMPERATURE

Operating temperature: **from -40°C to 80°C**

Safety factor on working pressure: **3:1**

Here on the side: **Graph of pressure drop expressed as a % in relation to temperature**

