

AIR BRAKE SPIRAL HOSE

Spiral hose in PA 12 PHL dedicated to the compressed air connection between tractor and trailer on original equipment and after-market.

FEATURES

Spirals made with **12 PHL** plasticized **polyamide** tube, stabilized to light and heat, according to the requirements of DIN 73373. Available in **4 standard colors** and with **bicone fittings and hose connectors** M16, M18 and M22 x1.5.

SECTORS



AUTOMOTIVE

NORMS AND DECLARATIONS

DIN 73378

APPLICATIONS

AIR BRAKE SYSTEMS

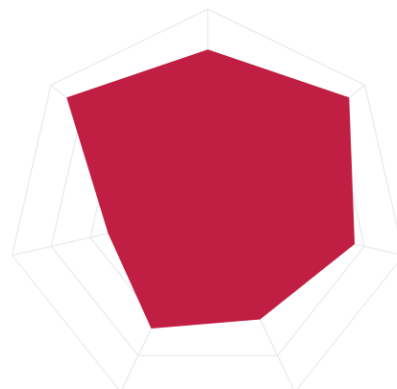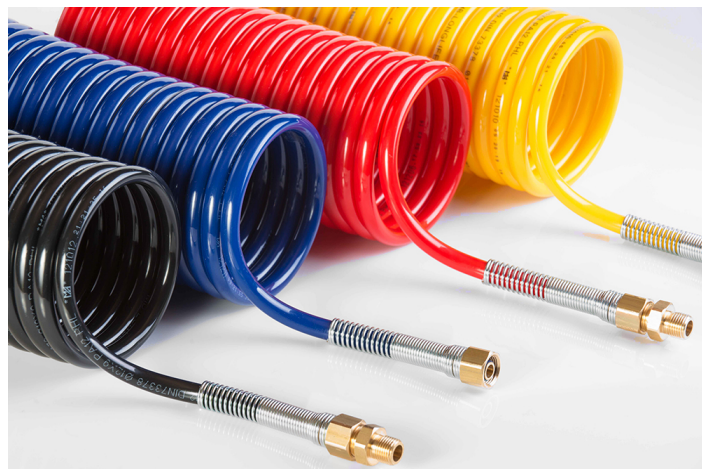

ADDITIONAL INFO

PRODUCT DETAILS

	External Ø (mm)	Internal Ø (mm)	Wall thick (mm)	Material length (m)	Operatin g length (m)	Retracte d length (mm)	Turns number (n°)	Tales (mm)	Internal/e xternal coil Ø (mm)	Weight (g/N)	Colors
SABPA8 X12X5C	12+-0,1	8	2+-0,07	5	3,5	202	13	180-180	80-104	330	●●●●
SABPA8 X12X7C	12+-0,1	8	2+-0,07	7	4,5	290	23	180-180	80-104	462,1	●●●●
SABPA9 X12X5C	12+-0,1	9	1,5+-0,07	5	3,5	164	13	180-180	100-124	259,9	●●●●
SABPA8 X12X6C	12+-0,1	9	1,5+-0,07	6	4	202	16	180-180	100-124	311,9	●●●●
SABPA8 X12X7C	12+-0,1	9	1,5+-0,07	7	4,5	240	19	180-180	100-124	363,8	●●●●

PRESSURE/TEMPERATURE

Operating temperature: from -40°C to 80°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

